



SAMPLE REPORT — reference design, not your parklet

CURBSIDE

Schematic parklet design for Vancouver streets

Sample parklet

Example street, Vancouver
2026-10-05

Preliminary: not for construction

Checks: 0 fail, 0 not confirmed,
19 pass (design)

AI-assisted visualisation — indicative. Rendered with the author's Replicate account for this sample; your own renders use the key you add in Connections.

ed visualisation – indicative

G-001 WHAT TO DO NEXT

[read this page and the cover](#)

Step 2, Site facts: measure or confirm on site

Nothing: every value the checks read is measured or confirmed.

Step 3, Design: what fails and how to resolve it

None.

Then

Enter each measurement in step 2, Site facts; step 5, Check, re-runs every check; step 7, Export, prints this set again. A check is settled only by measured values; an estimate or imported data gives a provisional result, and a fact not known yet leaves the check awaiting measurement.



V-101 Street view

Camera: 49.5 mm lens, 29 deg to the deck axis · Nano Banana Pro (2K) · rendered 2026-09-25
Rendered with the author's Replicate account for this sample; your own renders use the key you add in Connections.



V-102 Sidewalk view

Camera: 49.5 mm lens, 20 deg to the deck axis · Nano Banana Pro (2K) · rendered 2026-09-25
Rendered with the author's Replicate account for this sample; your own renders use the key you add in Connections.

AI-assisted visualisation — indicative

Sample · page 4/19



V-103 Corner view

Camera: 49.5 mm lens, 6 deg to the deck axis · Nano Banana Pro (2K) · rendered 2026-09-25
Rendered with the author's Replicate account for this sample; your own renders use the key you add in Connections.



V-104 Aerial view

Camera: isometric, as the axonometric · Nano Banana Pro (2K) · rendered 2026-09-25
Rendered with the author's Replicate account for this sample; your own renders use the key you add in Connections.

Curbside parklet drawing set

Sample parklet

Example street, Vancouver

Lat 49.28270, lon -123.12070 – street bearing 0.0 deg – parklet on the east side

Checks: 0 fail, 0 not confirmed, 19 pass (design)


Preliminary: not for construction

Drawing list

Sheet	Title	Scale
V-000	Cover	NTS
G-001	What to do next	
V-101 to V-104	Renders: Street, Sidewalk, Corner, Aerial	NTS
A-000	Title sheet	NTS
A-101	Site plan	1:250
A-102	Layout plan	1:200
A-103	Deck plan	1:75
A-201	Street section	1:100
A-202	Parklet section	1:25
S-001	Furniture schedule	
G-002	Cost estimate	
C-001	Compliance	
S-002	Site survey	
X-001	Sources	

Revisions

Rev	Date	Description
A	2026-10-05	Preliminary issue for the Parklet Manual pre-application (generated by Curbside v0.18)



Legend

	Cut: deck, curb in section (0.70)
	Objects: deck edge, furniture (0.50)
	Edges: curbs, railing (0.35)
	General (0.25)
	Context, dimensions (0.18)
	Fine: hatching, grid (0.13)
	Clearance zone (red: the check fails)
	Required distance, nothing measured: "req."
	Section line A-A, centre line
	Match line, property line
	Hidden, overhead, lane line
	Fire hydrant
	Utility pole
	Signal controller box
	Access chamber / manhole
	Street tree canopy (genus tag)
	Bus stop
	Grid line at a railing post
	Level (datum: top of curb)
	Key: its note in the sheet's notes
	Rule of a clearance zone
	Clearance: measured · rule · check (red: fails)
	Concrete
	Timber deck, along the boards
	Planting
	Earth, subgrade
	Cut building
	Cut steel, thin material
	Accessible route

Abbreviations

C01 – C19	Parklet Manual checks
CoV	City of Vancouver (open data)
DBH	diameter at breast height
EDM	Engineering Design Manual
max / min	maximum / minimum
NTS	not to scale
OSM	OpenStreetMap
typ.	typical
z	distance along the street from the deck start (m)

- Notes
- Dimensions in metres unless noted; drawings at the scale stated on a 17 x 11 in sheet.
 - Generated from the design model; imported site data is indicative and must be verified on site.
 - Sources, the renders' credits and the model's assumptions: sheet X-001.


Notes

- 1

Parklet, 19.80 m: layout A-102, deck A-103.
- 2

Section A-A: the street on A-201, the parklet on A-202.
- No street trees in this stretch.
- 3

Buildings from OpenStreetMap, cut at the sheet's extent (78.50 x 55.00 m); name and use where known.
- Site objects from City of Vancouver open data: indicative, confirm on site.

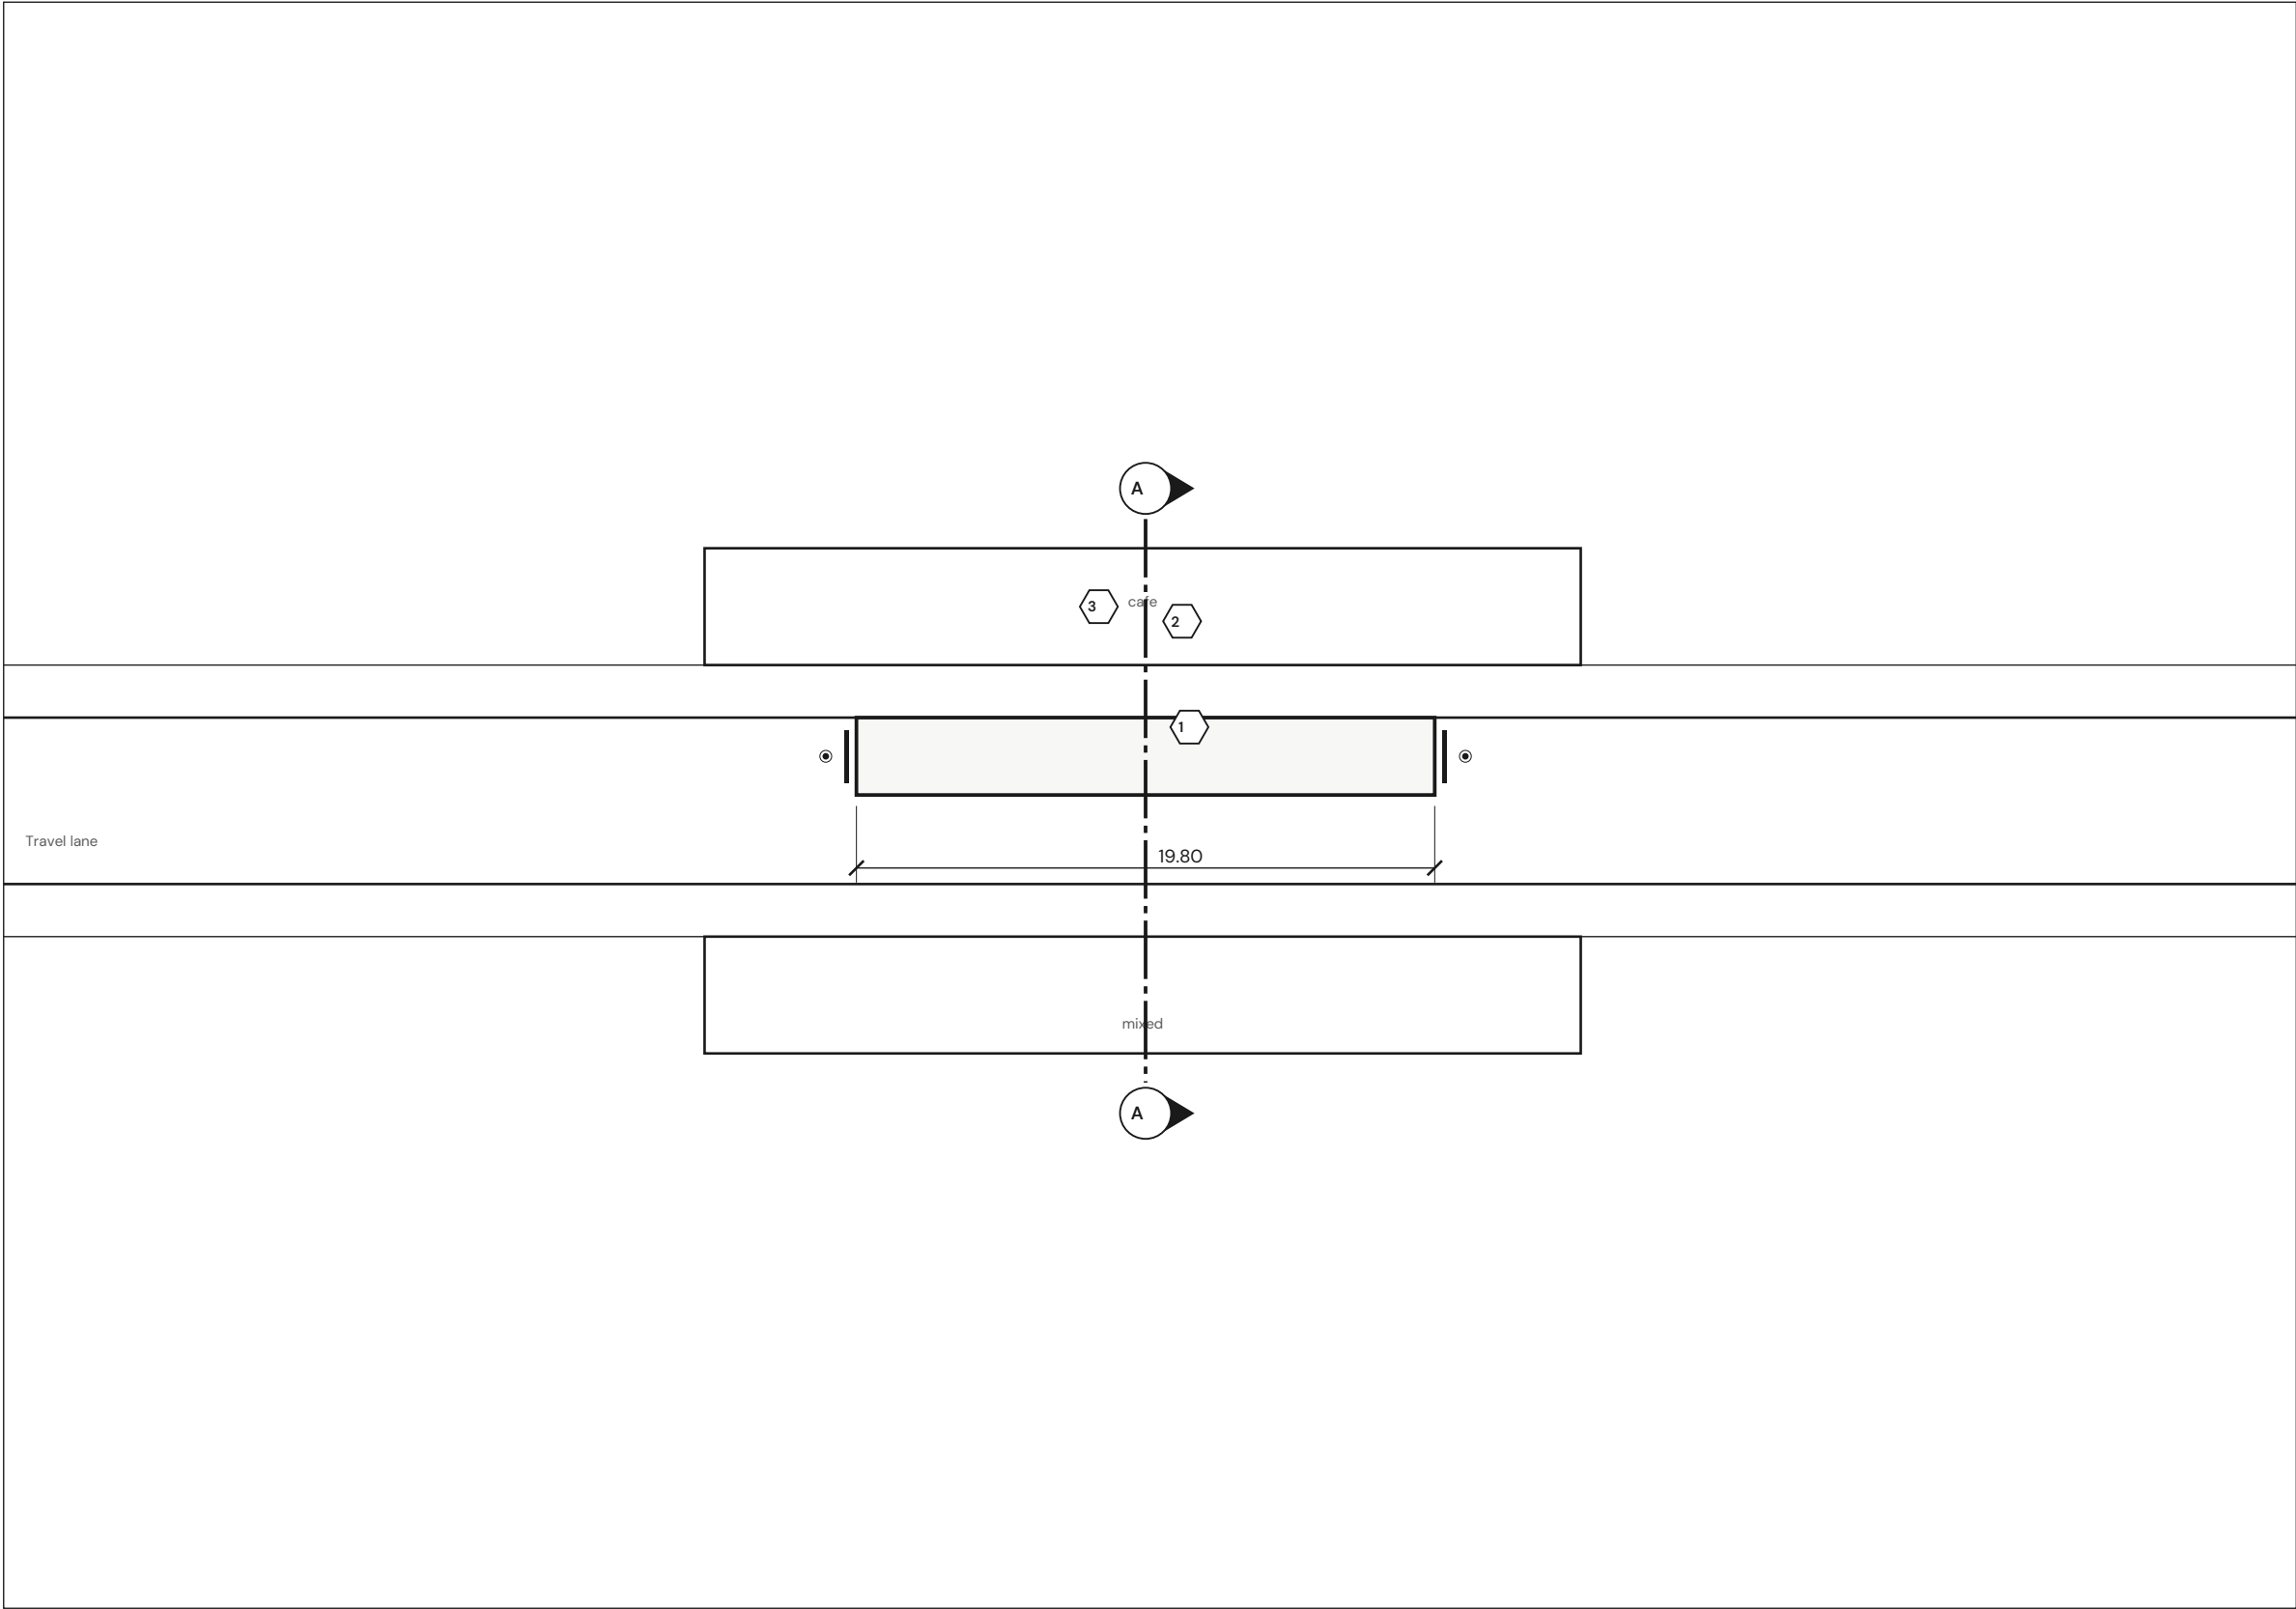

A-101 Site plan

Notes

- 1


Segments from the Section editor, chained with the overall, frontage to far curb.
- 2

The deck located from the host frontage (cafe).
- 3


Clearance zones dashed, with their rule (C03 crosswalk, C05 hydrant, C07 pole, C08 signal, C09 chamber, C13 parking). Each clearance: measured, then rule and check beneath; red: the check fails.
- Furniture tags: schedule S-001.
- 4

Wheel stop and flexible bollard at each end, supplied and installed by the City; location to City (Parklet Manual p. 48, 59).
- 5

Section A-A: the street on A-201, the parklet on A-202; deck plan A-103.

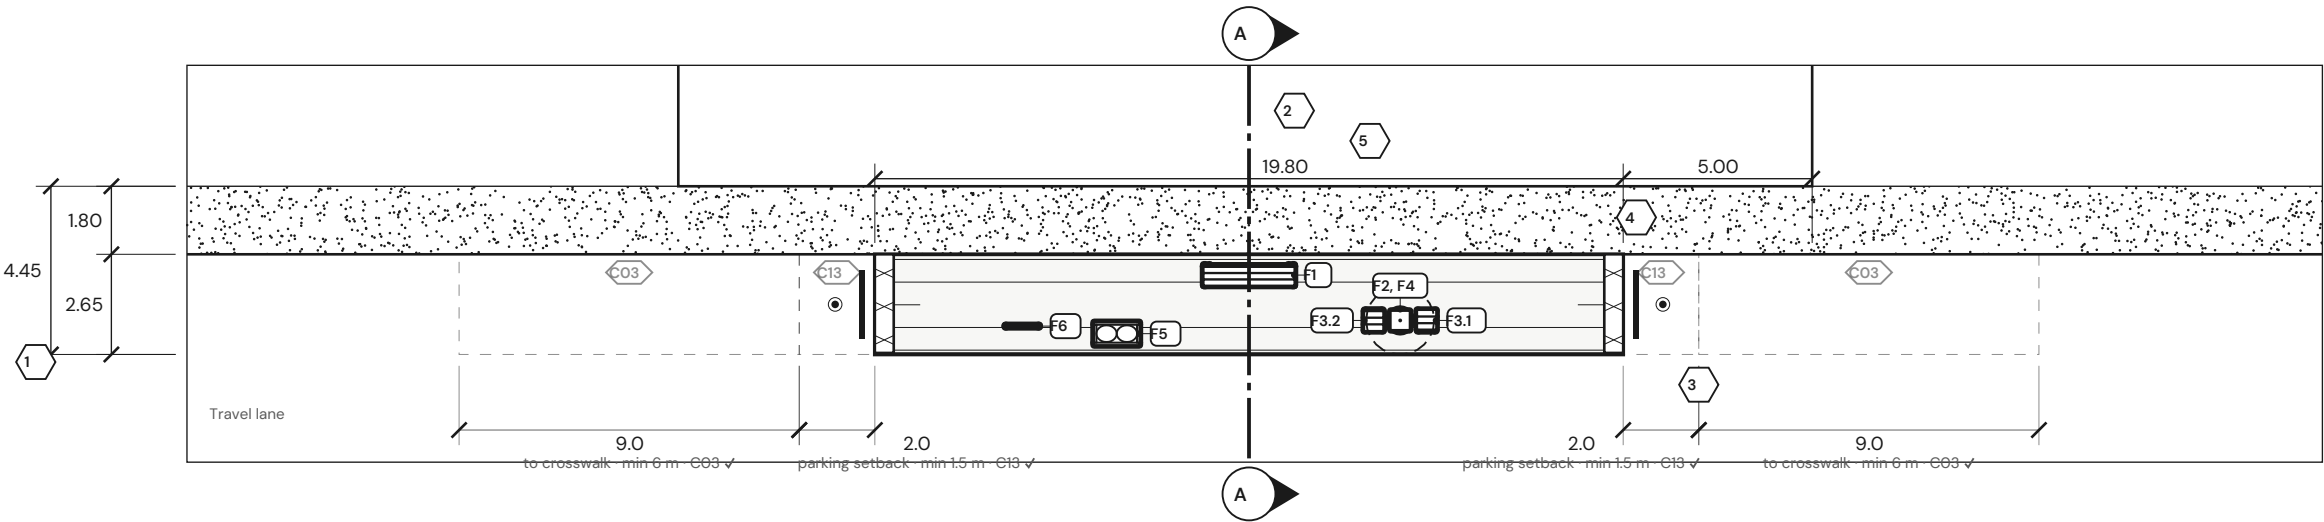

A-102 Layout plan

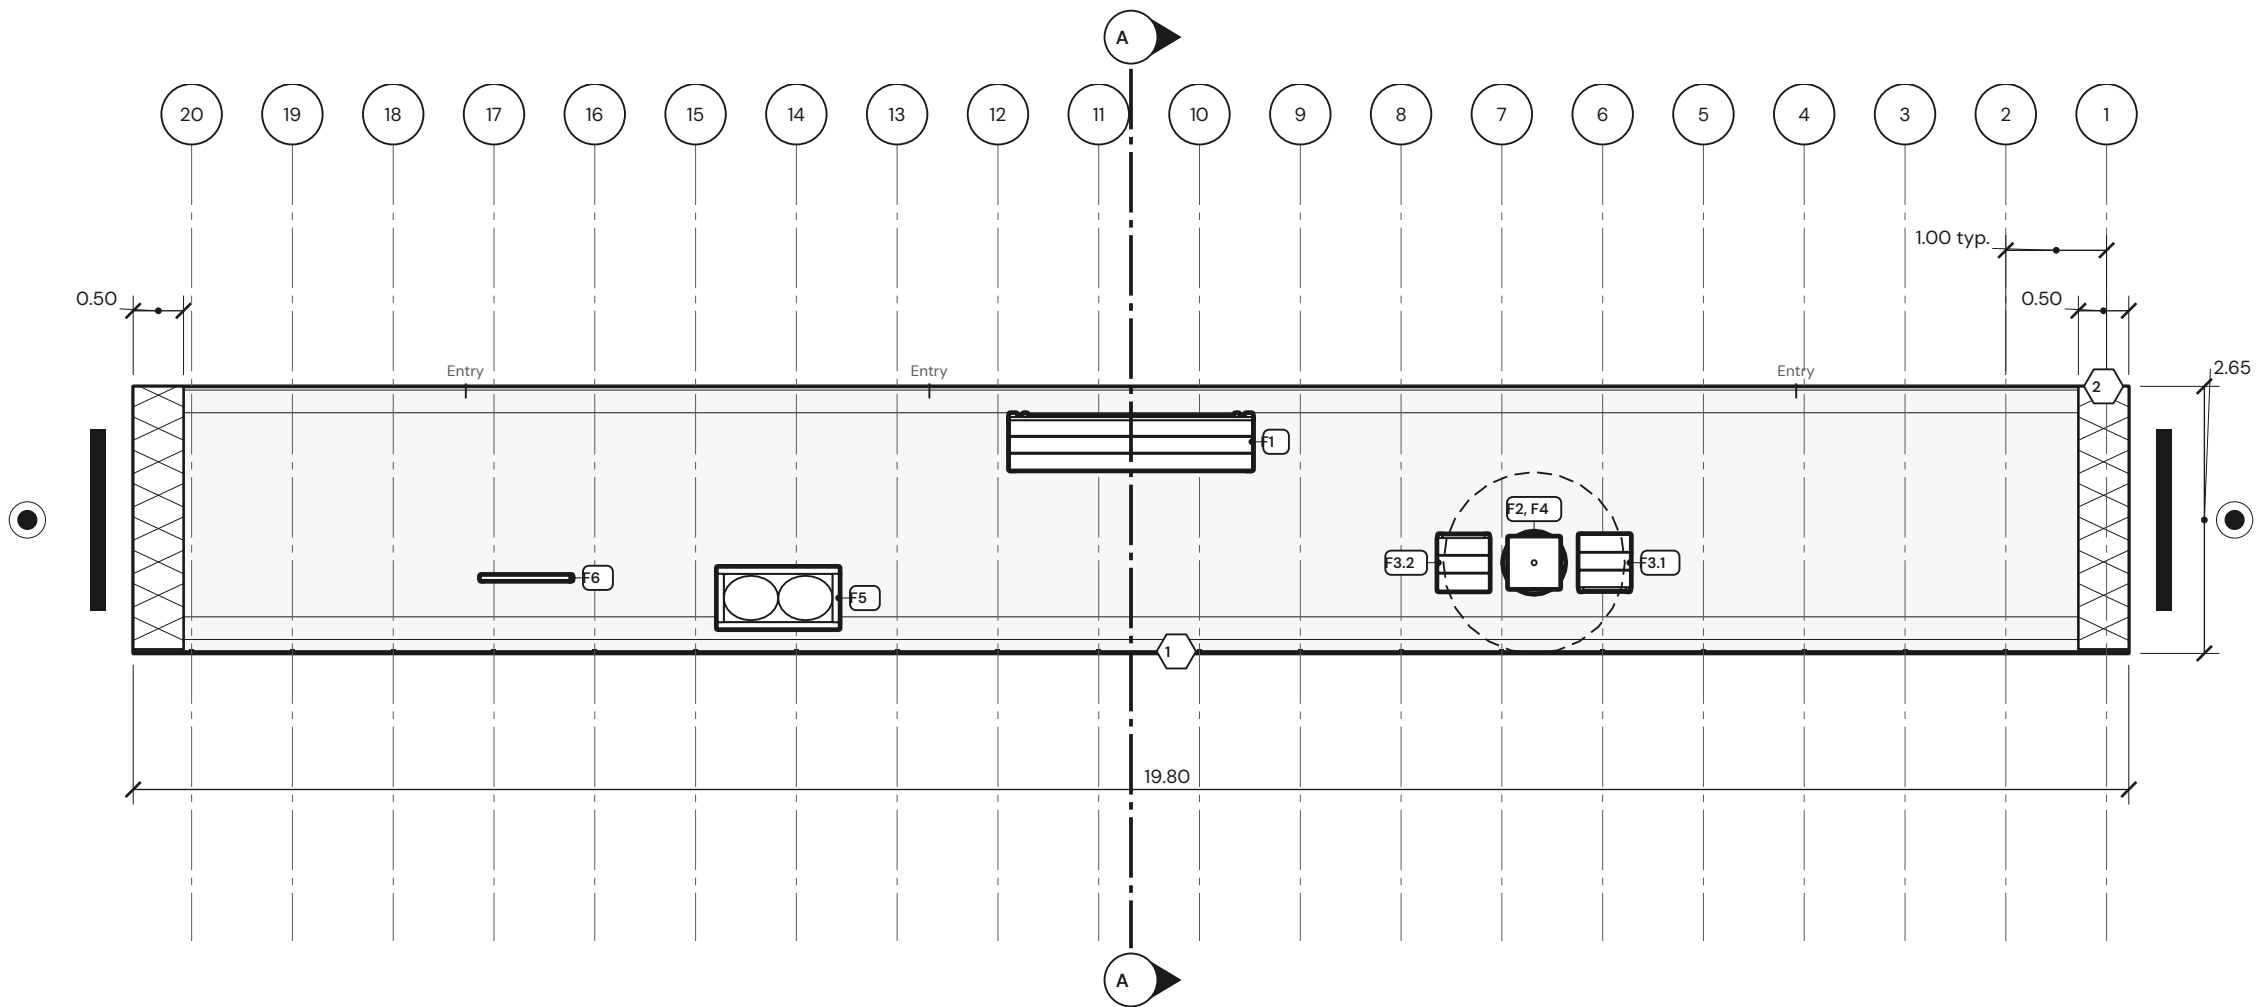


Notes

- Grid lines 1, 2, 3 ... at the enclosure posts on the traffic side, 1.00 m apart, the first at 0.22 m.
- Furniture tags: schedule S-001.
- End enclosure: planter wall, 0.50 m deep, 0.90 m high.
- Enclosure: steel picket in galvanized, 0.90 m high on the traffic side, at the deck edge; planter wall at both ends: in section on A-202.
- Drawn at 1:75: the deck is too long for 1:50 on one sheet.



A-103 Deck plan

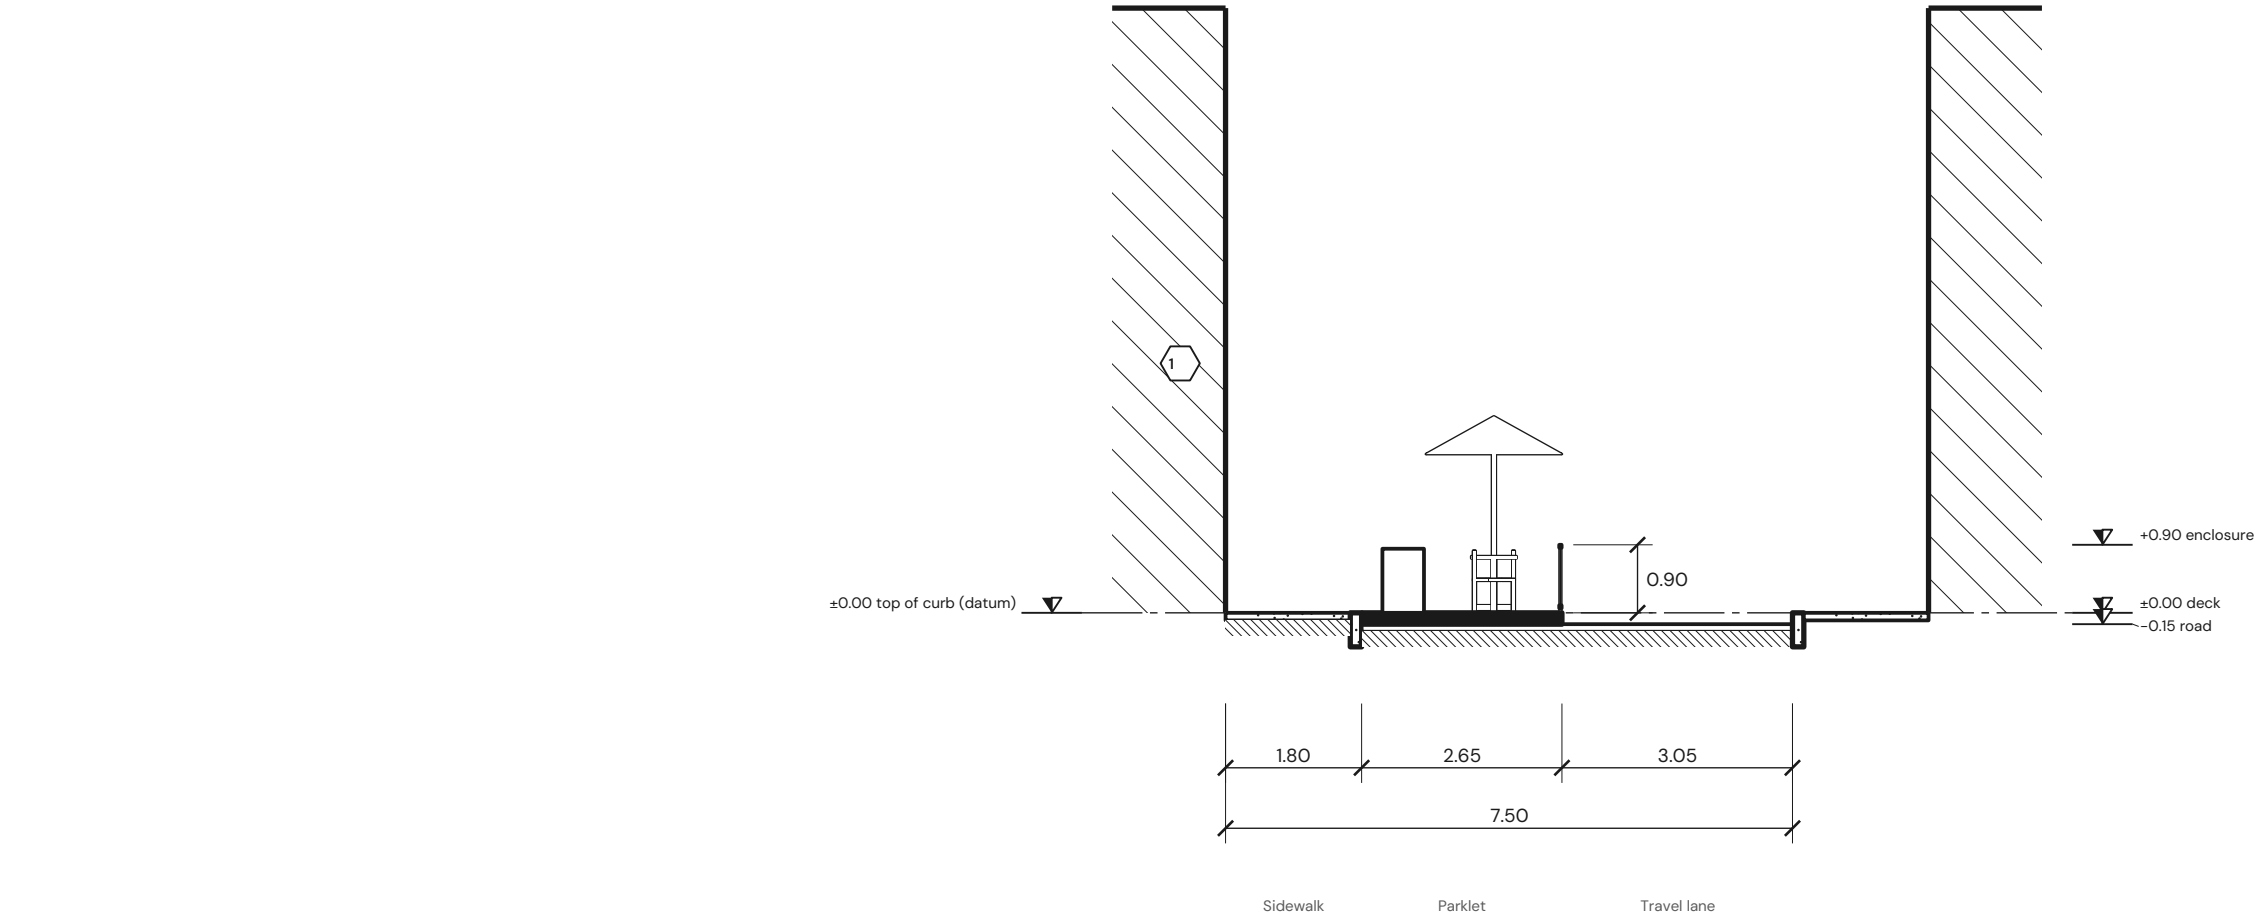


Notes

- Street section A–A at z 9.90 m, looking –z, 6.0 m beyond in elevation; the parklet in detail on A–202.
- Building at the cut: no address point.
- Beyond the cut: outlines, the nearer in front. Trees: flat silhouettes by form, behind everything.



A–201 Street section

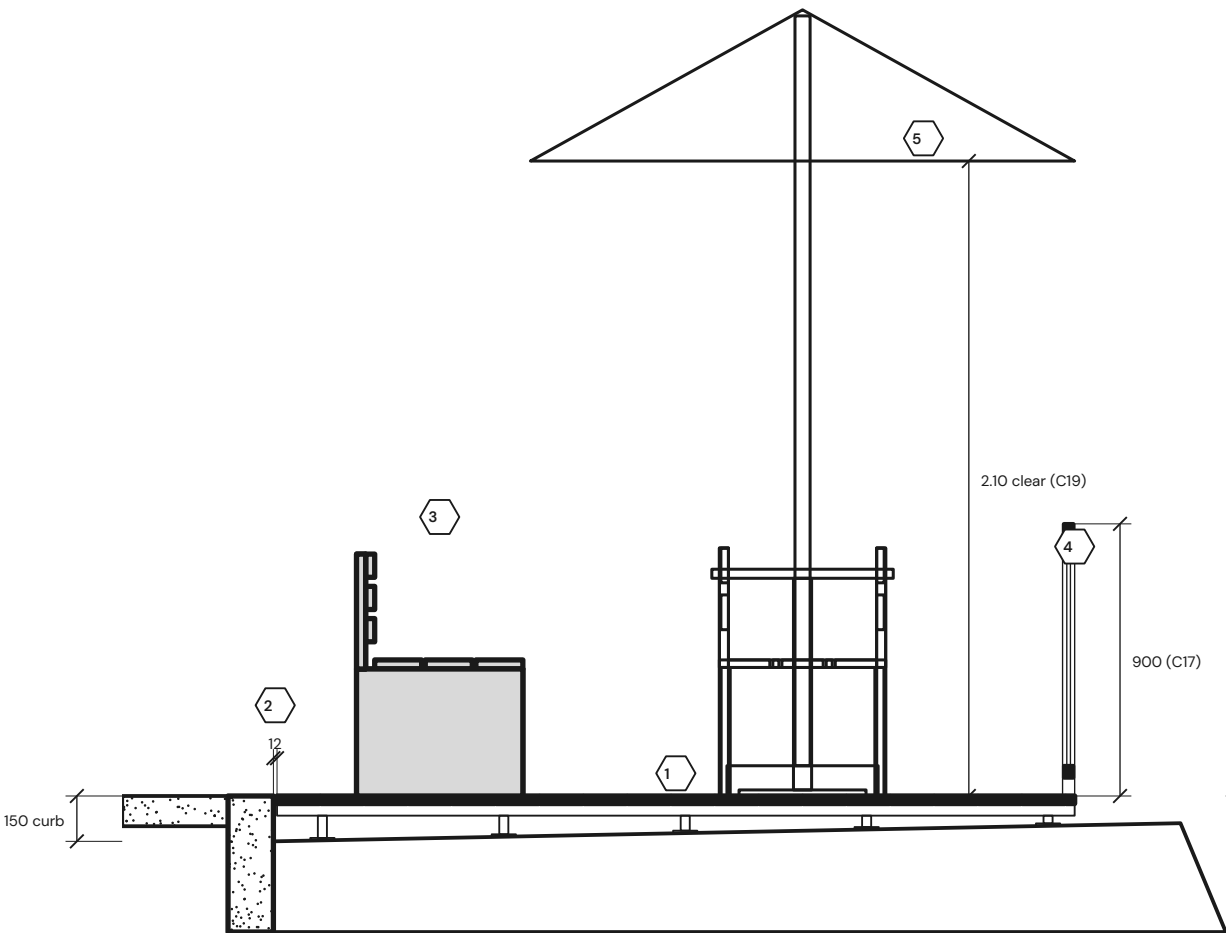


Notes

– A–A at z 9.90 m, looking –z: the parklet and the curb it meets; the street on A–201.

3 Bench, cut: 2.40 x 0.55 x 0.80 m.

- 1 Deck: 19 boards 140 mm wide, 25 mm thick, 5 mm joints, on 40 mm battens on 5 adjustable pedestals per row, set to the road's crossfall (2 %, assumed: measure it on site); top of deck flush with the curb.
- 4 Enclosure: steel picket (bar 12 mm, bars at 100 mm, post 40 mm, posts at 1000 mm), 0.90 m above the deck (C17: 0.75–1.0 m).

- 2 Deck edge at the curb: gap 12 mm (C14: 12 mm at most, a connector plate 13 mm high at most where wider; Parklet Manual p. 62).
- 5 Umbrella: 2.10 m clear above the deck (C19: 2.10 m at least, within the footprint).



A–202 Parklet section

S-001 FURNITURE SCHEDULE

Tag	Item	Size l x d x h	Material	Count	Source
F1	Bench 2.4 m, with back	2.40 x 0.55 x 0.80	frame: Black steel; seat: Black stain; back: Black stain	1	generic archetype
F2	Cafe table dia. 0.6 m	0.60 x 0.60 x 0.75	frame: Black steel; top: Terrazzo	1	generic archetype
F3	Chair 0.5 m	0.50 x 0.55 x 0.82	frame: Galvanized; seat: Thermowood	2	generic archetype
F4	Umbrella dia. 1.8 m	1.80 x 1.80 x 2.60	pole: Aluminium; canopy: Fabric, canvas; base: Precast grey	1	generic archetype
F5	Planter 1.2 m	1.20 x 0.60 x 0.60	body: Galvanized	1	generic archetype
F6	Bike rack 0.9 m	0.90 x 0.04 x 0.80	frame: Galvanized	1	generic archetype
Total		6 types		7	

Tags F1, F2 ... mark each piece on the deck plan A-103 and the layout plan A-102. Sizes in metres from each piece's parameters (the numbers the 3D and the plans draw).

Enclosure

Side	Archetype	Height	Run x depth	Materials	See-through
Traffic side	Steel picket	0.90 m	19.80 x 0.040	Galvanized	85 %
Start end	Planter wall	0.90 m	2.61 x 0.500	Corten, Foliage	30 %
Far end	Planter wall	0.90 m	2.61 x 0.500	Corten, Foliage	30 %
All runs	3 runs		25.02 m		

Buffer 0.00 m inside the deck's traffic-side edge (unusable: planting or void); usable width 2.61 m of 2.65 m. Heights above the deck; a planter's is the top of its planting (E2, Parklet Manual p. 64). In section on A-202. Buffer 0.00 m: a buffer of at least 0.30 m is recommended from a busy travel lane (Parklet Manual E2, advisory).

Parklet materials

Part	Material	Set by
Deck surface	Light timber (default deck)	default
Deck edge (fascia)	Dark timber (default fascia)	default
Enclosure posts and rails	each enclosure archetype's own	default
Enclosure infill (pickets, slats, cables)	each enclosure archetype's own	default
Planter boxes	each enclosure archetype's own	default
Screens	each enclosure archetype's own	default

G-002 COST ESTIMATE

Vancouver indicative 2026, CAD

Indicative 2026 rates: every build line priced (4 sourced · 4 indicative · 1 proxy); 7 furniture pieces await a quote; the build is within the Parklet Manual's typical range for 4 parking spaces (\$40,000 – \$60,000). Rate set: Vancouver indicative 2026, CAD. Indicative unit rates for a Vancouver parklet, October 2026: retail material prices from Canadian suppliers' public listings and published Canadian installed ranges, each line with its basis (retrieved 2026-10-04). A line with no credible public source shows — and is counted as not priced. Not a quote: confirm every rate with a supplier.

Build					\$31,412 – \$55,237
City fees					\$1,404
Total					\$32,816 – \$56,641
Against the Manual				within, \$40,000 – \$60,000 for 4 spaces	

Estimate

Item	Qty	Unit	Rate, CAD	Cost, CAD	Where the number comes from
Build					
Decking, softwood (pressure-treated)	57.72	m²	\$23 – \$26	\$1,352 – \$1,518	sourced: pressure-treated 5/4 x 6 x 12 ft deck board, \$12.38 (Turkstra Lumber) to \$13.90 (Kent), per 0.5285 m² of board
Joists, pressure-treated 2 x 6	132.5	m	\$5 – \$6	\$684 – \$742	sourced: pressure-treated 2 x 6 x 12 ft, \$18.88 (RONA) to \$20.48 (Kent, "starting at"), per 3.658 m; read from the retailers' listings in a web search on 2026-10-04 (their product pages refuse automated reads)
Levelling pedestals, adjustable	300	each	\$18 – \$26	\$5,442 – \$7,761	sourced: Bison Versadjust adjustable pedestal V1-V4, \$18.14 (sale) to \$25.87 (regular), DeckMart, Vaughan ON, a Canadian Bison seller (Level.It \$21.12)
Deck installation labour	52.47	m²	\$209 – \$387	\$10,945 – \$20,326	indicative: derived: Decksforlife (Toronto, 23 February 2026) pressure-treated deck installed at \$30–50 a square foot (\$323–538 a m², materials, labour and standard stairs), less this set's own pressure-treated materials per m² (decking with waste, joists at 0.40 m, pedestals at 0.40 x 0.60 m: \$114–151); no Canadian source found states the labour share itself
Edge: steel picket, installed	19.8	m	\$230 – \$427	\$4,547 – \$8,445	indicative: aluminum picket railing, installed \$70–130 per linear foot (Builders Ontario 2026; DecksForLife \$83–120)
Planter wall (edge)	5.22	m	\$230 – \$427	\$1,199 – \$2,226	proxy: priced as aluminum picket railing, installed \$70–130 per linear foot (Builders Ontario 2026): a planter wall (Corten, galvanized or timber) has no public rate per metre
Planter soil	0.84	m³	\$82 – \$96	\$69 – \$81	sourced: bulk garden mix from \$44 per tractor scoop of about 60–70 % of a cubic yard (Arts Nursery, Metro Vancouver), material only
Design and permit drawings			8–12 %	\$1,939 – \$4,932	indicative: an allowance of 8–12 % of the build lines (Brief 32): no published Vancouver figure for parklet drawings
Contingency			20 %	\$5,235 – \$9,206	indicative: NerdWallet Canada (February 2026): budget an extra 20 % on a renovation for the unexpected
Furniture					
Bench 2.4 m, with back (2.40 x 0.55 x 0.80 m)	1	each	–	–	awaiting a quote: not priced: enter a quote
Cafe table dia. 0.6 m (0.60 x 0.60 x 0.75 m)	1	each	–	–	awaiting a quote: not priced: enter a quote
Chair 0.5 m (0.50 x 0.55 x 0.82 m)	2	each	–	–	awaiting a quote: not priced: enter a quote
Umbrella dia. 1.8 m (1.80 x 1.80 x 2.60 m)	1	each	–	–	awaiting a quote: not priced: enter a quote
Planter 1.2 m (1.20 x 0.60 x 0.60 m)	1	each	–	–	awaiting a quote: not priced: enter a quote
Bike rack 0.9 m (0.90 x 0.04 x 0.80 m)	1	each	–	–	awaiting a quote: not priced: enter a quote
City fees					
Application review fee	1	once	\$204	\$204	sourced: Manual p. 37 (2016)
Program cost recovery fee	1	once	\$1,000	\$1,000	sourced: Manual p. 40 (2016)
Site inspection, before and after	1	once	\$200	\$200	sourced: Manual p. 40 (2016)
Parking meter removal	0	meter	\$125	\$0	sourced: Manual p. 40 (2016), if applicable
Annual renewal fee (each year after)	1	year	\$500	\$500 a year	sourced: Manual pp. 19, 40 (2016); yearly, not in the build total
Total, build and fees				\$32,816 – \$56,641	what is not priced is not counted

G-002 Cost estimate

G-002 COST ESTIMATE (CONT.)

Vancouver indicative 2026, CAD

The Manual's typical range for 4 parking spaces: \$40,000 – \$60,000 (\$10,000 – \$15,000 a space, Manual p. 18, 2016). For comparison only, not in the total.

Quantities (from the design)

Item	Qty	Unit	How it is counted
Deck area	52.47	m²	the applied outline's area (DESIGN_MODEL.parklet.area)
Deck perimeter	44.9	m	the sum of the outline's 4 edges
Joists / sleepers (run)	132.5	m	50 joists across the deck every 0.40 m along 19.80 m, each as long as the deck is wide there
Levelling pedestals	300	ea	300 pedestals: under each of the 50 joists, one at each end and between them every 600 mm or less
Decking (with waste)	57.72	m²	52.47 m² x (1 + 10 % waste)
Enclosure run (railing types)	19.8	m	the runs of the rail and bench types above
Enclosure posts	20	ea	the posts the 3D view draws, every run
Planters	3	ea	Planter wall (Start end); Planter wall (Far end); Planter 1.2 m
Planter soil	0.84	m³	each planter's inside, length x depth x (height - 0.10 m)
Parking spaces taken	4	ea	19.80 m / 6.0 m a space, rounded up (6.0 m is our estimate; the Manual gives none)

City of Vancouver fees: the Manual's 2016 figures; confirm them against the current fee schedule (<https://vancouver.ca/streets-transportation/parklets.aspx>). Wheel stops, bollards, no-stopping signs and the parklet sign are supplied by the City (Manual p. 48). An estimate to plan a budget, not a quote.

C-001 COMPLIANCE

0 fail · 0 not confirmed · 19 pass (design)

Checks, failures first

Rule	Manual reference	Requirement	Measured value	Result
C01	Parklet Manual p. 20	All-day parking permitted (no rush-hour, bus, taxi, or loading zone)	Parking all day No restrictions — all-day parking permitted · entered by you. No restrictions — all-day parking confirmed	Pass (design)
C02	Parklet Manual p. 20; EDM Table 8-10	Adjacent travel lane ≥ 3.0 m (3.2 m for bus/truck routes)	Curb to curb 5.70 m · entered by you. 1 lane × 3.050 m ≥ 3.0 m	Pass (design)
C03	Parklet Manual p. 20	Minimum 6 m setback from nearest intersection / crosswalk edge	Intersection setback 9 m · entered by you. 9 m ≥ 6 m minimum. Pass (design)	Pass (design)
C04	Parklet Manual p. 20	Street running slope ≤ 5%	Street slope 2 % · entered by you. 2% ≤ 5%. Pass (design)	Pass (design)
C05	Parklet Manual p. 21	Minimum 5 m clearance on either side of any fire hydrant	Fire hydrant 12 m · entered by you. 12 m ≥ 5 m minimum. Pass (design); value entered, not drawn	Pass (design)
C06	Parklet Manual p. 62	Minimum 1.5 m setback from adjacent driveways or lanes	Driveways and lanes 8 m · entered by you. 8 m ≥ 1.5 m minimum. Pass (design); value entered, not drawn	Pass (design)
C07	Parklet Manual p. 21	Minimum 1 m clearance from poles (2.4 m if trolley wires attached)	Poles 4 m; No trolley wires · entered by you. 4 m ≥ 1.0 m (standard pole). Pass (design); value entered, not drawn	Pass (design)
C08	Parklet Manual p. 21	Minimum 2 m clearance from traffic signal controller boxes / electrical kiosks	Signal controllers and kiosks 14 m · entered by you. 14 m ≥ 2 m minimum. Pass (design); value entered, not drawn	Pass (design)
C09	Parklet Manual p. 21	Minimum 1 m clearance from manhole lids, valves, grates, access chambers	Manholes, valves, grates 5 m · entered by you. 5 m ≥ 1 m minimum. Pass (design); value entered, not drawn	Pass (design)
C10	Parklet Manual p. 21	Does not block Fire Dept. connections, utility connections, or fire exits	Fire and utility connections No — confirmed clear · entered by you. No blockages confirmed. Pass (design); value entered, not drawn	Pass (design)
C11	Parklet Manual p. 21	Curb and roadside drainage maintained — street drains not blocked	Drainage Yes — all drains clear; drainage channel designed in · entered by you. Drainage confirmed clear and channel designed in. Pass (design); value entered, not drawn	Pass (design)
C12	Parklet Manual p. 20	Minimum pedestrian clearances on boulevard / utility strip maintained	Boulevard clearances Boulevard not used — stays within parking lane only · entered by you. Boulevard not used. Criterion not triggered. Pass (design)	Pass (design)
C13	Parklet Manual p. 62	Minimum 1.5 m setback from adjacent parking spaces	Parking setback 2 m · entered by you. 2 m ≥ 1.5 m minimum. Pass (design)	Pass (design)
C14	Parklet Manual p. 62	Deck flush with the sidewalk (gap at most 12 mm; connector at most 13 mm)	from the design. Deck flush with the curb, 12 mm gap (12 mm max). Pass (design)	Pass (design)
C15	Parklet Manual p. 62	Deck load capacity ≥ 7.2 kPa	Designed load capacity 7.5 kPa · entered by you. 7.5 kPa ≥ 7.2 kPa minimum. Pass (design)	Pass (design)
C16	Parklet Manual p. 60	Accessible route 1.5 m clear from an entry, 1.5 m turning space	from the design. 3 routes 1.50 m clear or more from the entries to the cafe table, the bench end; 1.50 m turning space at each entry, turn and end. Pass (design)	Pass (design)
C17	Parklet Manual p. 64	Enclosure 0.75–1.0 m high on the traffic side and both ends	from the design. traffic side 0.90 m (steel picket), ends 0.90 / 0.90 m: within 0.75–1.0 m. Pass (design)	Pass (design)
C18	Parklet Manual p. 65	At least two unobstructed openings of 1.8 m or more to the sidewalk	from the design. 3 entries to the sidewalk (1.80 m at z 3.30, 1.80 m at z 11.90, 1.80 m at z 16.50), each 1.8 m or more. Pass (design)	Pass (design)
C19	Parklet Manual p. 65	Overhead elements at least 2.1 m clear above the deck and within the footprint	from the design. umbrella 2.10 m clear: at least 2.1 m and within the footprint. Pass (design)	Pass (design)

Advisory (no numbered check)

Advisory	Detail
Deck 2.65 m wide – Parklet Manual: typically 2.3–2.5 m; wider to be confirmed by the City	Parklet Manual p. 20 and P2, p. 62: the adjacent lane rule leads to a deck of 2.3–2.5 m; the City confirms the maximum width.

Lane envelope, EDM Table 8-10: travel lane widths (m); this design's route in bold

Route	Lane role	Absolute min.	Preferred	Max.
Standard	rightmost	2.80	3.00	3.40
Standard	other	2.70	3.00	3.20
Standard	single	2.90	3.00	3.50
Bus / truck	rightmost	3.00	3.20	3.50
Bus / truck	other	3.00	3.20	3.20

C-001 Compliance

C-001 COMPLIANCE (CONT.)

0 fail · 0 not confirmed · 19 pass (design)

Lane envelope, EDM Table 8-10: travel lane widths (m); this design's route in bold (cont.)

Route	Lane role	Absolute min.	Preferred	Max.
Bus / truck	single	3.50	3.50	3.60

Route of this design: standard. Rightmost = the lane next to the parklet (or its bike lane / buffer); single = a lone travel lane. Below preferred needs City Engineer approval (note 4); above maximum is an exception only (note 8), never beyond 4.8 m.

Beside the parklet (from the Section): the travel lane. Bike lane: none. The rightmost travel lane (3.05 m) is the first beyond the parklet.

Street changes: existing (as imported) against proposed (the Section)

No imported street is recorded: import the street context to compare the Section with it.

This design (m)

Lane	Direction	Role	Width	Abs. min.	Preferred	Max.	Band	C02 min.	C02
1	one-way	single	3.05	2.90	3.00	3.50	within preferred – maximum	3.00	Pass (design)

C02 (Parklet Manual p. 20): the adjacent travel lane stays at least 3.0 m (3.2 m on bus / truck routes). Widths are the Section's travel-lane segments.

S-002 SITE SURVEY

values to measure on site

Measure on site

Measure each item on site and write the value in the last column; then enter them in Curbside with "I've measured on site" in the Site tab.

Site fact	Value now	How it is known	Measured
C01 Parking all day	No restrictions — all-day parking permitted	entered	
C02 Curb to curb	5.70 m	entered	
C02 Travel lanes	1 (one-way)	entered	
C02 Adjacent travel lane	Standard traffic lane only	entered	
C03 Intersection setback	9 m	entered	
C04 Street slope	2 %	entered	
C05 Fire hydrant	12 m	entered	
C06 Driveways and lanes	8 m	entered	
C07 Poles	4 m; No trolley wires	entered	
C08 Signal controllers and kiosks	14 m	entered	
C09 Manholes, valves, grates	5 m	entered	
C10 Fire and utility connections	No — confirmed clear	entered	
C11 Drainage	Yes — all drains clear; drainage channel designed in	entered	
C12 Boulevard clearances	Boulevard not used — stays within parking lane only	entered	
C13 Parking setback	2 m	entered	

X-001 SOURCES

Standards and data	
Source	Used for
City of Vancouver, Parklet Manual, Version 1.0 (June 2016)	criteria C01 – C15 and their pages
Parklet Manual E2, p. 64	C17: the enclosure 0.75 – 1.0 m high on the traffic side and both ends; the 0.30 m buffer advised from a busy travel lane (advisory)
Parklet Manual E3, p. 65	C18: at least two unobstructed openings of 1.8 m or more to the sidewalk
Parklet Manual E5, p. 65	C19: overhead elements at least 2.1 m clear above the deck and within the footprint
Parklet Manual E4, p. 64; G13	a solid edge flagged for the City to confirm (advisory)
City of Vancouver, Engineering Design Manual (2026)	Table 8–10 travel lane widths (8.7.3.1, pp. 275–277); bike lane and buffer widths (8.5.4.5)
City of Vancouver Standard Detail Drawings	W4.1 fire hydrant clearance; WW1 manhole; E5.19C utility pole; E1.3 signal controller base
City of Vancouver street standards placement guidance	street furniture offsets
Parklet Manual G19, p. 60	accessible route 1.5 m clear and a 1.5 m turning area (C16; the 1.1 m route of the BC Building Code, 3.8, noted and not used)
Rate set: Vancouver indicative 2026, CAD	Indicative unit rates for a Vancouver parklet, October 2026: retail material prices from Canadian suppliers' public listings and published Canadian installed ranges, each line with its basis (retrieved 2026–10–04). A line with no credible public source shows — and is counted as not priced. Not a quote: confirm every rate with a supplier. (G–002)
City of Vancouver, Vancouver Parklet Manual, version 1.0 (June 2016)	the authority: rules P1–P9 (pp. 62–63), E2 (p. 64), G15–G19 (p. 60), costs and fees (pp. 18, 37, 40), City-supplied items (pp. 48, 59)
San Francisco Planning, San Francisco Parklet Manual, version 2.2 (2015)	how another city builds them: platform, drainage, railings, materials
NACTO, Urban Street Design Guide: Parklets	design load, slip resistance, substructure, drainage, winter removal
Parkade, "Complete guide to parklets – and how to build them" (2024) (https://parkade.com/parklet-guide-and-how-to-build-a-parklet)	the build sequence and the itemised retail prices of the placeholder rate set (USD)
City of Cincinnati, Parklet Program Guidelines (February 2025)	also consulted; no figure here is taken from it
City of Toronto, CafeTO council report (2023)	also consulted; no figure here is taken from it
Visualisation 1: Street view	AI-assisted, indicative; Nano Banana Pro (2K), rendered 2026–09–25; 49.5 mm lens, 29 deg to the deck axis. Rendered with the author's Replicate account for this sample; your own renders use the key you add in Connections.
Visualisation 2: Sidewalk view	AI-assisted, indicative; Nano Banana Pro (2K), rendered 2026–09–25; 49.5 mm lens, 20 deg to the deck axis. Rendered with the author's Replicate account for this sample; your own renders use the key you add in Connections.
Visualisation 3: Corner view	AI-assisted, indicative; Nano Banana Pro (2K), rendered 2026–09–25; 49.5 mm lens, 6 deg to the deck axis. Rendered with the author's Replicate account for this sample; your own renders use the key you add in Connections.
Visualisation 4: Aerial view	AI-assisted, indicative; Nano Banana Pro (2K), rendered 2026–09–25; isometric, as the axonometric. Rendered with the author's Replicate account for this sample; your own renders use the key you add in Connections.
DM Sans (SIL Open Font License 1.1)	the report's typeface, embedded
jsPDF, svg2pdf.js (MIT)	the PDF engine (tools/vendor)

Entered inputs

Input	Value
Parking restrictions at this location	No restrictions — all-day parking permitted
Is the adjacent lane a bus or truck route?	Standard traffic lane only
Distance to nearest crosswalk / intersecting sidewalk edge	9 m
Street running slope at this block	2 %
Distance to nearest fire hydrant (each side)	12 m
Distance to nearest driveway or lane	8 m
Distance to nearest pole	4 m
Trolley wires on this pole?	No trolley wires
Distance to nearest signal box / electrical kiosk	14 m
Distance to nearest manhole / valve / grate	5 m
Does the parklet footprint block any FD / utility connection or fire exit?	No — confirmed clear
Are all street drains / catch basins clear of the footprint?	Yes — all drains clear; drainage channel designed in
Does the parklet use the boulevard strip, and if so, are pedestrian clearances maintained?	Boulevard not used — stays within parking lane only
Setback from adjacent parking space / meter (each end)	2 m
Designed load capacity	7.5 kPa

From the design model

Value	Derived from
Travel lane widths	the Section editor's travel-lane segments against EDM Table 8–10 (3.05 m)
Deck area	the rectangle footprint, 52.47 m2
Compliance	each check's own result for the inputs above; an input not entered leaves its check not confirmed
Seats, route, entries	the generator's metrics of the current layout (access model)
Enclosure, deck levels	DESIGN_MODEL.enclosure (steel picket in galvanized, 0.90 m high on the traffic side, at the deck edge; planter wall at both ends) and PARKLET_LEVELS, the numbers the 3D, the render and these drawings share

Assumptions

Topic	Assumption
Furniture positions	the model's; not field-measured
Buildings	heights and depths are entered or imported estimates, for context only
Wheel stops and bollards	City-supplied; drawn nominally in the 1.5 m parking setback
C18 openings	a single clear run of w m along the sidewalk edge, between the end enclosures and 1.5 m deep, counts floor(w / 1.8) openings (Parklet Manual E3: at least two of 1.8 m)
End planters (design saved before the enclosure)	End planters raised to 0.90 m planter walls to meet Parklet Manual E2 (0.75–1.0 m)
Host building programme	not entered: the default (cafe, glazed frontage) is used for the renders, the prompts and the Generate bias
Library dimensions	those marked DI are interpreted, not source data
Drawings	schematic, for the pre-application: not construction drawings; no structural or construction feasibility is assessed

X-001 Sources